

NEMA 17 Hybrid stepper motor


Rated voltage From 3V to 24V DC, speed, torque, etc. can be customized

典型应用 Typical Use

医疗设备 (Medical Devices)
美容设备 (Beauty equipment)
智能家居 (Smart Home)
商业设备 (Business Equipment)
通讯设备 (Communications equipment)
个人护理 (Personal Care)

主要特征 The main characteristics

- 运行平稳 Smooth operation
- 低噪音 Low noise
- 高扭力 High torque

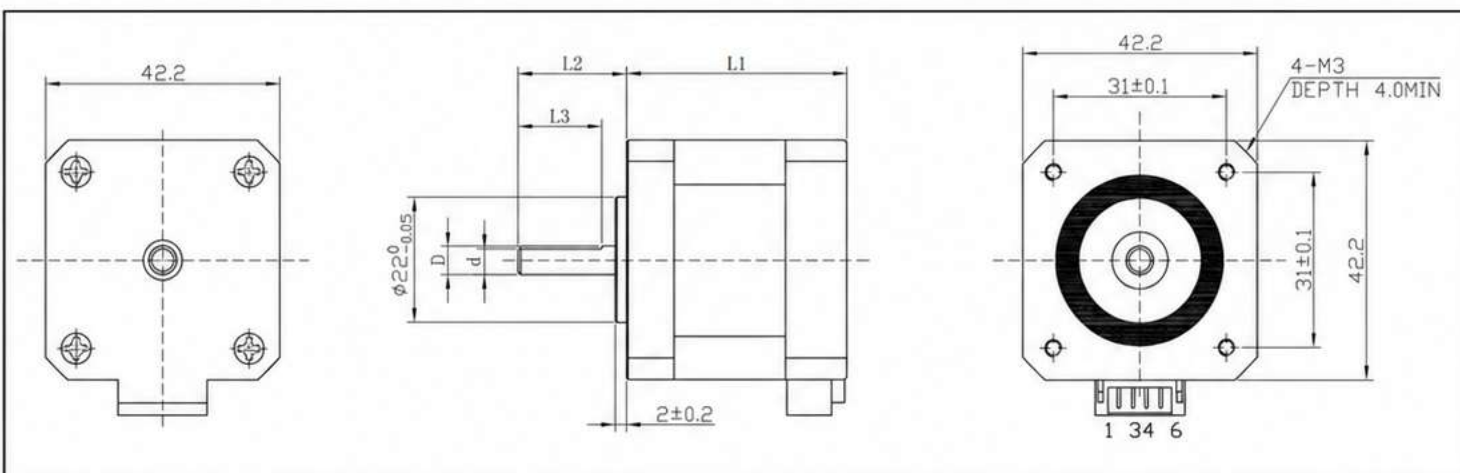

NEMA17 Motor Data Parameters

型号 Model	阻值(Ω) Resistance	电感 (mH) inductance	步距角(°) Step Angle	相数 Phases	力矩 Torque		尺寸 Size	
					额定电流/A Rated current	保持力矩(kg.cm) Holding torque	出轴长度(mm) Shaft length	电机厚度(mm) Motor thickness
KC-42HYB24	3.6	4.1	1.8	2	1	1.8	20	24
KC-42HYB33	3.8	6.3	1.8	2	1.5	4.4	144	33
KC-42HYB40	1.7	3.5	1.8	2	1	3.4	20	40
KC-42HYB48	5.8	10.5	1.8	2	1.4	7.6	22.5	48
KC-42HYB60	1.8	5.2	0.9	2	2	6.7	40	60
KC-42HYB68	2.7	7	1.8	2	1.5	8.7	22	68